


## Premium Extreme Weather Foil Tape

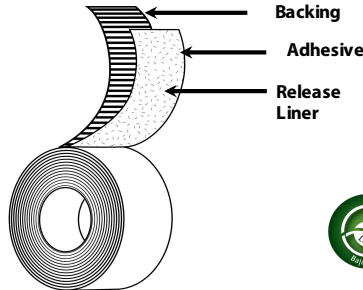

- Backing:** 1.75 mil Aluminum Foil
- Adhesive:** Acrylic
- Liner:** Polycoated Natural Kraft Paper
- Colors:** Aluminum
- Specifications:** UL 723 Classified ( $\leq 72\text{mm}$ )  
Meets FAR 25.853(a)  
US Coast Guard Approved 46 CFR 164.012
- Standard Sizes:** 48mm x 46M, 72mm x 46M

### Applications

- Taping joints and seams in duct work for A/C, heating, and ventilation systems
- Insulation seaming and patching
- Sealing insulation and repairing in cooler/refrigeration applications
- General purpose industrial and automotive uses
- Aircraft sealing and masking
- Window mask to protect aircraft canopies, windshields and passenger window surfaces from crazing or hazing during paint stripping

### Features

- 1.75 mil Aluminum Foil Backing
- High Performance Acrylic Adhesive
- Code Approved
- Low VOC Content

### Benefits

- Conformable to fit corners and joints
- UV, moisture, and mold resistant
- Low odor
- High tack, aggressive bond to surfaces
- Excellent performance in extreme cold or heat
- Meets flammability requirements for use in construction, aerospace and marine applications
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	3.5 mils	0.089 mm	ASTM D-1000
<b>Foil Thickness</b>	1.75 mils	0.044 mm	ASTM D-1000
<b>Adhesion to Steel</b>	55 oz/in	6.02 N/cm	PSTC-101
<b>Tensile Strength</b>	14 lb/in	24.52 N/cm	ASTM D-1000
<b>Operating Temperature</b>	-35 to 260 °F	-37 to 127 °C	
<b>Minimum Application Temp</b>	-5 °F	-20 °C	
<b>Smoke Developed</b>	0		
<b>Flame Spread</b>	0		
<b>VOC Content</b>	<30 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.