


Premium Gaffer's Tape

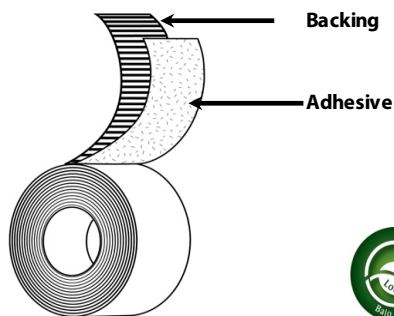

- Backing:** Matte-Finish Vinyl Coated Cloth
- Adhesive:** Rubber
- Liner:** N/A
- Colors:** Black
- Specifications:** Tested in accordance with UL 723
- Standard Sizes:** 48mm x 50m

Applications

- Protect and anchor wiring in the photography and film industry
- Bookbinding
- Vinyl seat repair
- Wrapping or bundling wire, metals and plastics
- Color coding
- General repair

Features

- Heavy-Duty Coated Cloth Backing
- Natural Rubber Adhesive
- Low VOC Content

Benefits

- Matte-finish for less reflectivity and low sheen
- Excellent durability and conformability
- High tack for a variety of surfaces
- Clean removal - no residue
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	11.5 mils	0.292 mm	ASTM D-1000
Adhesion to Steel	50 oz/in	5.47 N/cm	PSTC-101
Tensile Strength	42 lb/in	73.55 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
Smoke Developed	5		
Flame Spread	15		
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25C): 12 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.